




Grinda de ridicat sarcini cu carlige cu autoechilibrare Tip K5

- Material : Otel inalt aliat
- Produs finit : vopsit

Dispozitivele de ridicare cu lant corespund carligelor de macara conform cu DIN15401.

Cinci/sapte carlige cu scripeti pentru lant suspendate pe acelasi lant –DIN 5687-8 – asigura reglarea inaltimei aliniata si sarcina egala pe carlige.

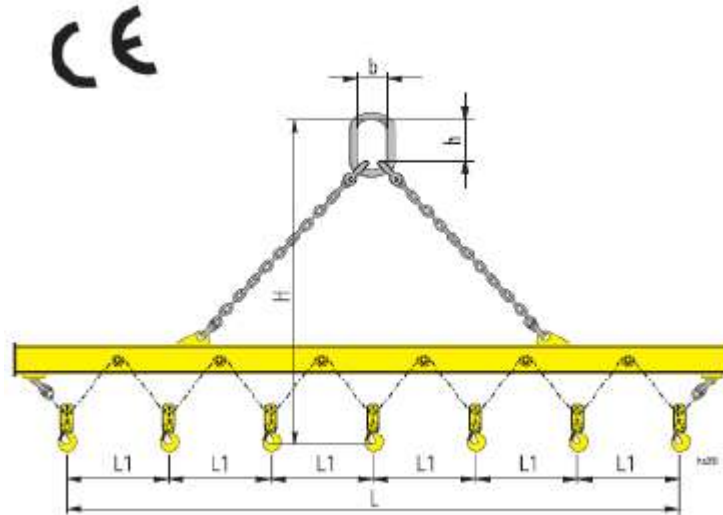

Tabel dimensiuni

| Sarcina max. adm. (Kg) | Dimensiuni (mm) | | | | | Nr. minim de carlige folosibile | Nr. carlige de sarcina | Masa (Kg) |
|---------------------------------|--------------------|------|------|-----|-----|---|---------------------------------|--------------|
| | L | L1 | H | h | b | | | |
| 4000 | 3000 | 750 | 1300 | 180 | 100 | 2 | 5 | 280 |
| | 4000 | 1000 | 1500 | | | | | 350 |
| 6000 | 4500 | 750 | 1850 | 200 | 110 | 3 | 7 | 400 |
| | 6000 | 1000 | 2030 | | | | | 480 |
| 9000 | 3000 | 750 | 1600 | 260 | 140 | 3 | 5 | 430 |
| | 4000 | 1000 | 1900 | | | | | 470 |
| 12000 | 4500 | 750 | 2100 | 300 | 160 | 4 | 7 | 530 |
| | 6000 | 1000 | 2580 | | | | | 550 |