




Grinda de ridicat sarcini suspendata cu dispozitiv cu lant Tip K4

- Material : Otel inalt aliat
- Produs finit : vopsit

Se pot confectiona cu lungime fixa sau cu brate de lungime reglabile cu ajutorul unor bolturi.
Dispozitivele de ridicare cu lant corespund carligelor de macara conform cu DIN15401

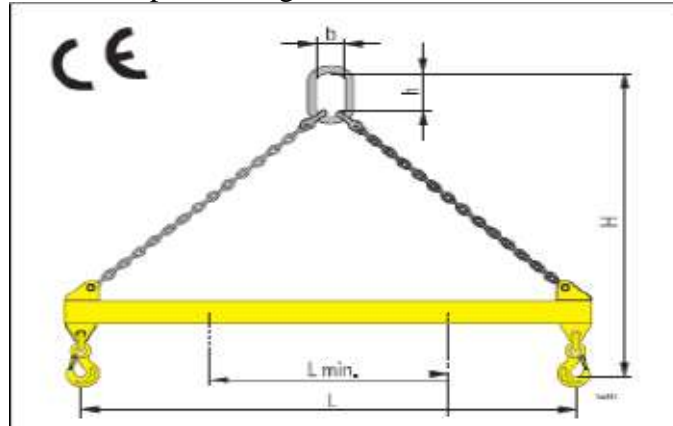

Tabel dimensiuni

Sarcina max. adm. (Kg)	Dimensiuni			Fix			Telescopic		
				H		Masa	L min.	H	Masa
	L	h	b	45°	60°				
1000	2000	110	60	1400		10	1500	1000-1300	15
	3000			1900		18	2000	1300-1830	23
	4000			2400		35	2500	1660-2370	40
2000	2000	135	75	1450		26	1500	1050-1350	30
	3000			1950		30	2000	1350-1880	38
	4000			2450		50	2500	1680-2410	55
3200	2000	160	90	1480		30	1500	1080-1380	34
	3000			1980		48	2000	1380-1910	53
	4000			2480		70	2500	1680-2440	75
5000	2000	180	100	1580		45	1500	1180-1480	50
	3000			2080		60	2000	1480-2000	64
	4000			2580		80	2500	1780-2540	87
10000	2000	260	140	1800		70	1500	1400-1700	78
	3000			2300		120	2000	1700-2220	134
	4000			2800		130	2500	2000-2760	142