




## Vertical clamp type TS / STS

- For vertical lifting and transporting of steel plates and structures.
- The TS/STS lifting clamps are equipped with a safety mechanism, ensuring the clamp does not slip when lifting force is applied and when load is being lowered.
- The clamp is locked in closed as well as in open position.
- Lifting capacity and jaw opening are clearly engraved in the body.
- Type STS are supplied with enlarged jaw opening.

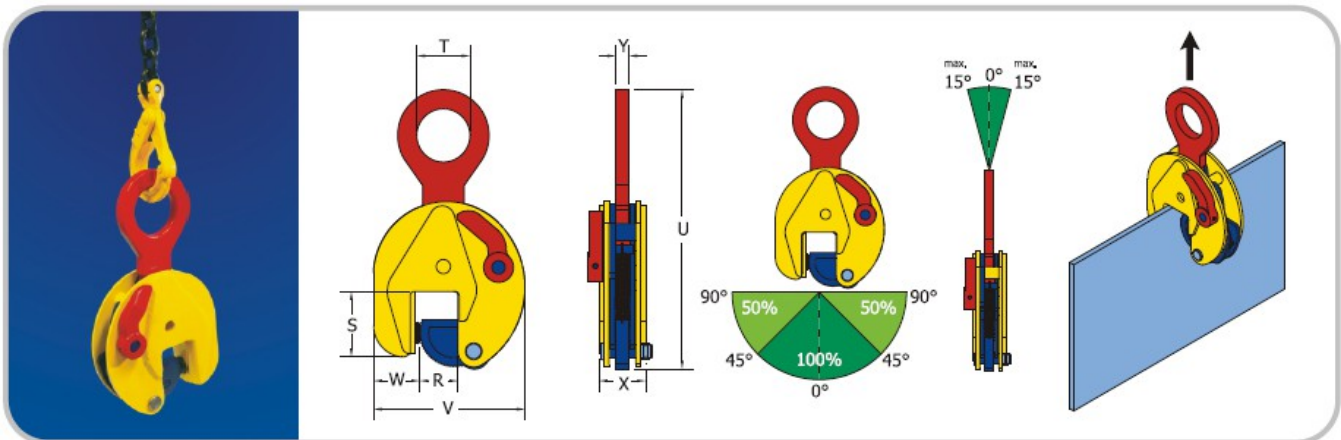

Ref. nr.	Type	Capacity (kg)	Jaw-opening (R) (mm)	Dimensions in mm							Weight (kg)
				S	T	U	V	W	X	Y	
850000	0.75 TS	750	0 - 13	47	30	205	100	35	37	10	1,5
850800	1 TS	1000	0 - 18	55	45	265	125	38	47	15	3,3
850880	1 TSE	1000	0 - 25	55	45	265	142	38	47	15	3,6
850100	1.5 TS *	1500	0 - 20	80	65	335	165	55	56	17	6,3
850901	2 TSE *	2000	0 - 35	80	65	335	185	55	56	17	6,5
850331	3 TSE *	3000	0 - 35	80	65	335	185	55	56	17	6,7
850441	4.5 TS	4500	0 - 25	85	70	430	200	60	77	20	14,8
850451	4.5 TSE	4500	0 - 45	85	70	430	230	60	77	20	15,9
850301	6 TS	6000	0 - 32	114	75	490	225	78	78	20	18,6
850401	7.5 TS	7500	0 - 40	112	75	530	245	76	86	20	24
851501	7.5 TSE	7500	0 - 55	112	75	530	267	70	86	20	25
851551	9 TS	9000	0 - 55	112	75	530	267	70	86	20	26
850501	12 TS	12000	0 - 52	148	85	617	295	100	94	44	42
915000	15 TS	15000	0 - 76	209	86	760	373	135	105	50	74
917000	17 TS	17000	0 - 76	209	86	760	373	135	105	50	74
920000	20 TS	20000	0 - 80	245	100	880	465	150	140	66	146
925000	25 TS	25000	5-85	245	100	880	465	145	140	66	146
930000	30 TS	30000	10-90	245	100	880	465	140	140	66	151
852200	6 STS	6000	40 - 90	115	75	490	275	70	78	20	15
854300	7.5 STS	7500	50-100	110	75	525	315	70	82	20	26
853305	9 STS	9000	50-100	110	75	525	315	70	82	20	27
852401	12 STS	12000	50-100	153	86	615	345	100	94	44	46
921500	15 STS	15000	80 - 150	220	86	755	450	128	106	50	80
922000	20 STS	20000	80 - 150	249	100	875	640	148	140	66	151
922500	25 STS	25000	80 - 150	249	100	875	640	148	140	66	151
923000	30 STS	30000	80 - 150	249	100	880	640	148	155	66	154