




## Screw clamp type TSCC

- Universal screw clamp for vertical and horizontal lifting and transporting of a large variety of steel structures.
- The TSCC screw clamp is fitted with a moveable cam on the thread spindle which provides a powerful clamping force on the workpiece.
- The articulated lifting eye ensures an effective clamping force in every position.

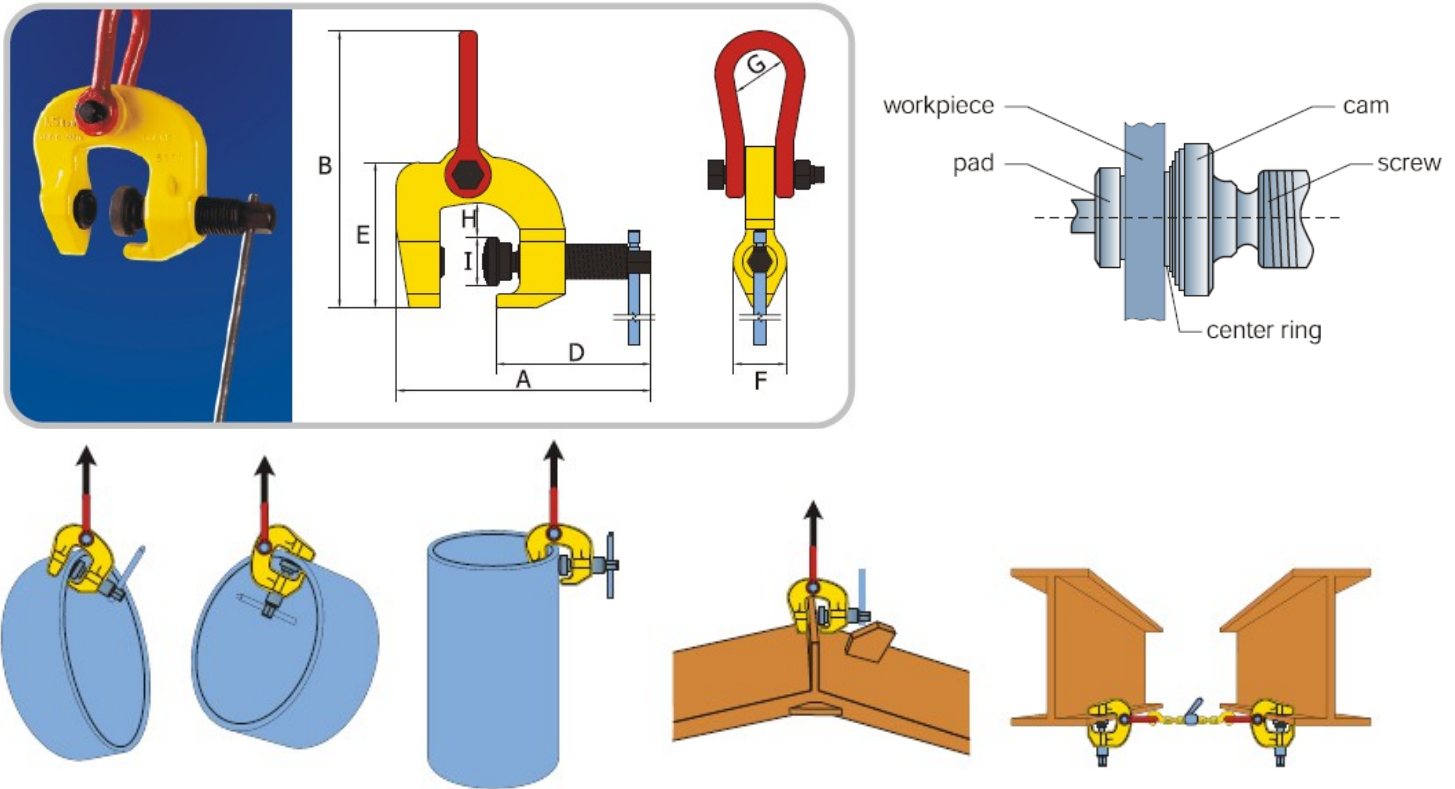

Ref. nr.	Type	Capacity (kg)	Jaw-opening (A) (mm)	Dimensions in mm								Weight (kg/pc)
				A	B	C	D	E	F	G	H	
862705	0.5 TSCC	500	0 - 28	156	113	26	89	76	30	17	27	0,8
862710	1 TSCC	1000	0 - 30	175	204	42	126	128	46	38	44	3,2
901500	1.5 TSCC	1500	0 - 40	197	232	42	142	140	46	46	30	4
862730	3 TSCC	3000	0 - 50	224	265	49	165	165	54	50	60	7
862760	6 TSCC	6000	0 - 75	291	365	63	215	214	69	80	76	18
862711	1 TSCC-W	1000	50 - 100	258	273	42	155	190	46	45	88	3,2
862731	3 TSCC-W	3000	25 - 75	250	291	49	165	191	54	50	76	7,8