



Electronic dynamometer DIN 105 TSL - HC

DIN 105TSL- HC

Technical specifications

- ▶ Steel Load cell tensile with flush-mounted electronic card.
- ▶ Linearity and repeatability accuracy: $\pm 0.1\%$ (o.f.s.v.)
- ▶ Safety degree: 5
- ▶ Admitted overload: 120%
- ▶ Tare reset function
- ▶ Battery test
- ▶ Re-chargeable battery supply (50 hour autonomy)
- ▶ 25 mm high red LCD 5 digit display
- ▶ Programmable stand-by and auto-deactivation
- ▶ IP 55 protection
- ▶ Operating temperature: $-10 \text{ }^{\circ}\text{C}$, $+55^{\circ}\text{C}$
- ▶ Nylon and glass fibre case for aggressive environment
- ▶ Multi function front keyboard

Dotazione standard

- ▶ Re-chargeable batteries and battery charger
- ▶ Radio remote control
- ▶ Wooden box
- ▶ SIT reference calibration report
- ▶ CE conformity declaration

Accessories on request

- ▶ Omega shackle (Crosby $\text{\textcircled{O}}$ type) and hook ; Revolving hooks fitted with shackle connection
- ▶ Remote repeater






Kinotech Industry

Galati - Romania
TEL./FAX: 0236-466.372
TEL./FAX: 0236-313.013

www.kinotech.ro

E-mail: office@kinotech.ro
Mobil: 0768-463.636
Mobil: 0723-694.919
Mobil: 0765-998.277
Mobil: 0766-360.062

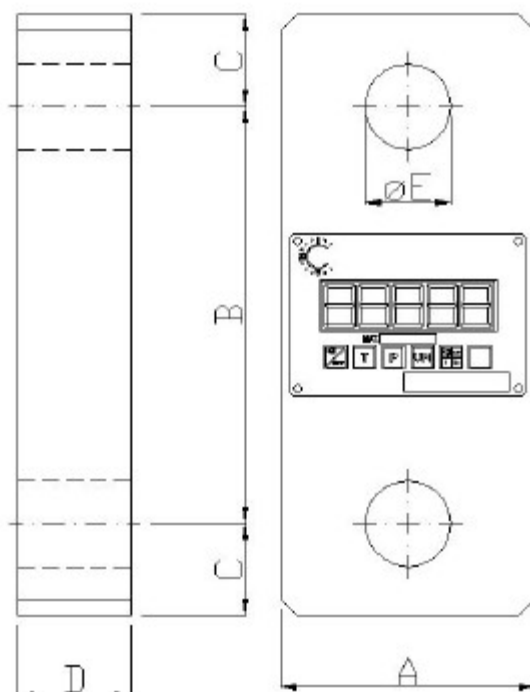

DIN 105 TSL

PORTATA [kg]	DIVISIONE [kg]	PESO [kg]	DIMENSIONI [mm]				
			A	B	C	D	øE
35000	10	36	170	340	60	80	59
50000	20	52	175	370	80	100	72
100000	50	105	200	450	120	125	98