



Electronic dynamometer DIN 105 TSL

DIN 105 TSL

Technical specifications

- ▶ Steel Load cell tensile electronic dynamometer
- ▶ Linearity and repeatability accuracy: $\pm 0.1\%$ (o.f.s.v.)
- ▶ Safety degree: 5
- ▶ Admitted overload: 120%
- ▶ Tare reset function
- ▶ Battery test
- ▶ Re-chargeable battery supply (50 hour autonomy)
- ▶ 25 mm high red LED 5 digit display
- ▶ Programmable stand-by and auto-deactivation
- ▶ IP 55 protection
- ▶ Operating temperature: -10 , $+55^{\circ}\text{C}$
- ▶ Nylon and glass fibre case for aggressive environment
- ▶ Multi function front keyboard


Standard supply

- ▶ Re-chargeable batteries and battery charger
- ▶ Radio remote control
- ▶ Case (up to 10.000 kg)
- ▶ Box (for 20 and 25 T)
- ▶ SIT reference calibration report

Accessories on request

- ▶ Omega shackle (Crosby[®] type) and hook ; Revolving hooks fitted with shackle connection
- ▶ Remote repeater



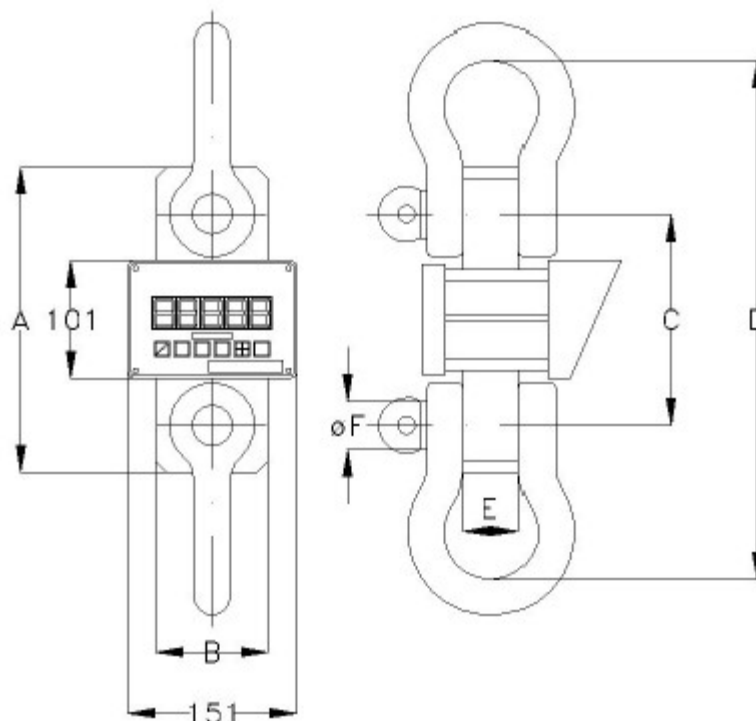

DIN105TSL

PORTATA [kg]	DIVISIONE [kg]	PESO [kg]	DIMENSIONI [mm]				
			A	B	C	D	E
2000	1	2,6	206	70	166	306	18
3200	1	3,2	206	70	166	306	25
6300	2	4,8	224	70	166	360	34
10000	5	8,6	270	100	188	462	49
25000	10	12,8	370	100	257	665	49