



## Electronic dynamometer DIN 105 TSG

### DIN 105 TSG

#### Technical specifications

- ▶ Load cell tensile electronic dynamometer fitted with revolving hook on bearings
- ▶ Linearity and repeatability accuracy:  $\pm 0.1\%$  (o.f.s.v.)
- ▶ Safety degree: 5
- ▶ Admitted overload: 120%
- ▶ Tare reset function
- ▶ Battery test
- ▶ Re-chargeable battery supply (50 hour autonomy)
- ▶ 25 mm high red LED 5 digit display
- ▶ Programmable stand-by and auto-deactivation
- ▶ IP 55 protection
- ▶ Operating temperature:  $-10$  ,  $+55^{\circ}\text{C}$
- ▶ Nylon and glass fibre case for aggressive environment
- ▶ No metrical check required

#### Standard supply

- ▶ Re-chargeable batteries and battery charger
- ▶ Radio remote control
- ▶ SIT reference calibration report
- ▶ CE conformity declaration

#### Fittings on request

- ▶ Remote repeater
- ▶ Bag





**Kinotech Industry**

Galati - Romania

TEL./FAX: 0236-466.372

TEL./FAX: 0236-313.013

www.kinotech.ro


E-mail: office@kinotech.ro

Mobil: 0768-463.636

Mobil: 0723-694.919

Mobil: 0765-998.277

Mobil: 0766-360.062

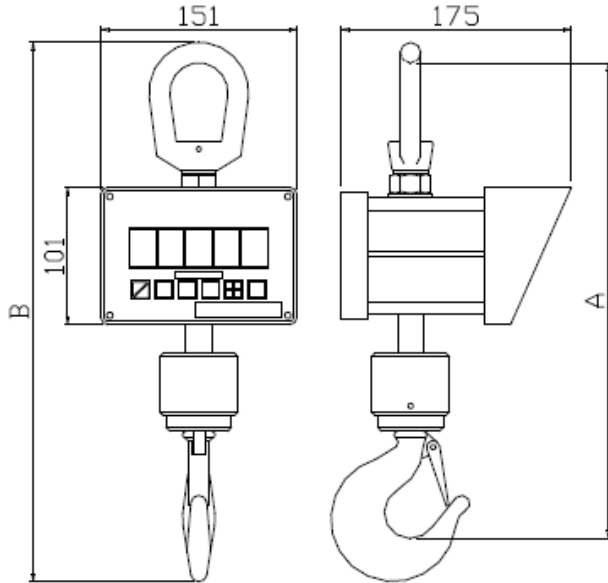

## DIN 105 TSG

PORTATA [kg]	DIVISIONE [kg]	PESO [kg]	DIMENSIONI [mm]	
			A	B
500	0,2	5	340	370
1000	0,5	5	360	390
2000	1	5	360	390